

## Modular Cooking Range Line EVO900 One Well Electric Fryer 23 liter

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

**392337 (Z9KKGDBAMCA)**

23-lt electric fryer with 1 "V" shaped well (external heating elements) and 2 half size baskets - free standing

**392384 (Z9KKG0BAMCA)**

23-lt electric fryer with 1 "V" shaped well (external heating elements), electronic control, 2 half size baskets - free standing

### Short Form Specification

**Item No.** \_\_\_\_\_

High efficiency external infrared heating elements (18kW) with innovative deflectors attached to the outside of the well. Deep drawn V-Shaped well. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

### Main Features

- Deep drawn V-Shaped well.
- External infrared heating elements with innovative deflectors applied to the well for ease of cleaning of the internal well and safe operations.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- IPX5 water resistance certification.
- The special design of the control panel offers a better guarantee against oil infiltration. (only for 392337)
- External panels in Stainless Steel with Scotch Brite finish.
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.
- The special design of the control knob system guarantees against water infiltration. (only for 392384)
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

### Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- Unit is 900mm deep to give a larger working surface area.
- Unit delivered with four 50 mm legs in stainless steel as standard.

### Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

APPROVAL: \_\_\_\_\_

## Included Accessories


- 1 of Door for open base cupboard (only for PNC 206342 392384)
- 1 of DOOR FOR OPEN BASE CUPBOARD PNC 206350 (only for 392337)
- 1 of 2 half size baskets for 18/23lt well PNC 927223 fryers

## Optional Accessories


- Stainless steel oil filter for 23 litres fryer to PNC 200086 remove particles of grease and food residuals) - EVO900
- Lid for oil container for 23 l fryers (only for PNC 200171 392384)
- Junction sealing kit PNC 206086
- 4 wheels, 2 swivelling with brake PNC 206135  (EVO700/900). It is mandatory to install with base supports for feet/wheels. (only for 392337)
- Flanged feet kit PNC 206136
- Frontal kicking strip for concrete PNC 206147  installation, 400 mm (only for 392384)
- Frontal kicking strip for concrete PNC 206148  installation, 800 mm (only for 392384)
- Frontal kicking strip for concrete PNC 206150  installation, 1000 mm (only for 392384)
- Frontal kicking strip for concrete PNC 206151  installation, 1200 mm (only for 392384)
- Frontal kicking strip for concrete PNC 206152  installation, 1600 mm (only for 392384)
- Side handrail for right/left hand (only for PNC 206165 392384)
- Frontal handrail 400 mm (only for 392384) PNC 206166
- Frontal handrail 800 mm (only for 392384) PNC 206167
- Pair of side kicking strips PNC 206180
- 2 panels for service duct (single PNC 206181  installation) (only for 392384)
- Large handrail (portioning shelf) 400 mm PNC 206185  (only for 392384)
- Large handrail (portioning shelf) 800 mm PNC 206186  (only for 392384)
- Frontal handrail 1200 mm (only for PNC 206191 392384)
- Frontal handrail 1600 mm (only for PNC 206192 392384)
- Hygienic lid for 23lt fryers PNC 206201
- 2 panels for service duct (back to back PNC 206202  installation) (only for 392384)
- Frontal kicking strip for 23lt fryers in two PNC 206203  parts
- Extension pipe for oil drainage for 15lt, PNC 206209  18lt, 23lt fryers
- 4 feet for concrete installation (not for 900 PNC 206210  line freestanding grill) (only for 392384)
- Chimney upstand, 400 mm PNC 206303
- 2 side covering panels, height 700 mm, PNC 206335  depth 900 mm (only for 392384)
- Door for open base cupboard (only for PNC 206342  392384)

- Base support for feet/wheels (lateral) for 23lt PNC 206372  fryers and pastacookers and refrigerated bases (900)
- Rear paneling - 600mm (EVO700/900) (only for PNC 206373 392384)
- Rear paneling - 800mm (EVO700/900) (only for PNC 206374 392384)
- Rear paneling - 1000mm (EVO700/900) (only PNC 206375  for 392384)
- Rear paneling - 1200mm (EVO700/900) (only PNC 206376  for 392384)
- Chimney grid net, 400mm PNC 206400
- Sediment collection tray for 23 litres fryer (to PNC 921023  be put in the well) - EVO900
- 2 half size baskets for 18/23lt well fryers PNC 927223
- 1 full size basket for 18/23lt well fryers PNC 927226
- Unclogging rod for 23lt fryers drainage pipe PNC 927227
- Deflector for floured products for the 23lt fryer PNC 960645

**Front**

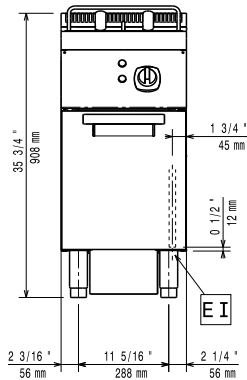


**Side**

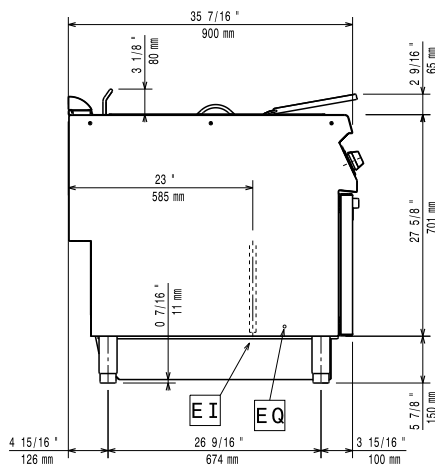

EI = Electrical inlet (power)  
EQ = Equipotential screw

**Top**

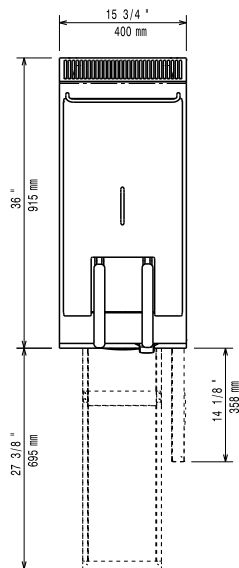

**Electric**

**Supply voltage:**

<b>392337 (Z9KKGDBAMCA)</b>	380-400 V/3N ph/50/60 Hz
<b>392384 (Z9KKGOBAMCA)</b>	415-430 V/3N ph/50/60 Hz

**Total Watts:**

<b>392337 (Z9KKGDBAMCA)</b>	18 kW
<b>392384 (Z9KKGOBAMCA)</b>	17.2 kW

**Key Information:**

<b>Usable well dimensions (width):</b>	340 mm
<b>Usable well dimensions (height):</b>	575 mm
<b>Usable well dimensions (depth):</b>	400 mm
<b>Well capacity:</b>	21 lt MIN; 23 lt MAX

**Performance\*:**

<b>392337 (Z9KKGDBAMCA)</b>	37.5 kg\hr
<b>392384 (Z9KKGOBAMCA)</b>	35.4 kg\hr

**Thermostat Range:** 105 °C MIN; 185 °C MAX

**Net weight:** 57 kg

**Shipping weight:**

<b>392337 (Z9KKGDBAMCA)</b>	73 kg
<b>392384 (Z9KKGOBAMCA)</b>	70 kg

**Shipping height:** 1080 mm

**Shipping width:** 460 mm

**Shipping depth:** 1020 mm

**Shipping volume:** 0.51 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**\*Based on:** ASTM F1361-Deep fat fryers

**Certification group:** EFE91M23