





PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- New 7 segment operational display panel for ease of use.
- Environmentally hard crystal-clear cubes that melt slowly.
- Unique closed cell water circuit for ultimate contamination protection.
- Auto rinse and flush cycle.
- Micro computer controller controls ice making process to work at peak performance in any conditions.
- Easily accessible and cleanable air filters reduce costly callouts.
- Inbuilt safety features - freeze cycle back up timer, defrost back up, low voltage and high amp protector.
- Durable stainless-steel exterior.



TECHNICAL DRAWING

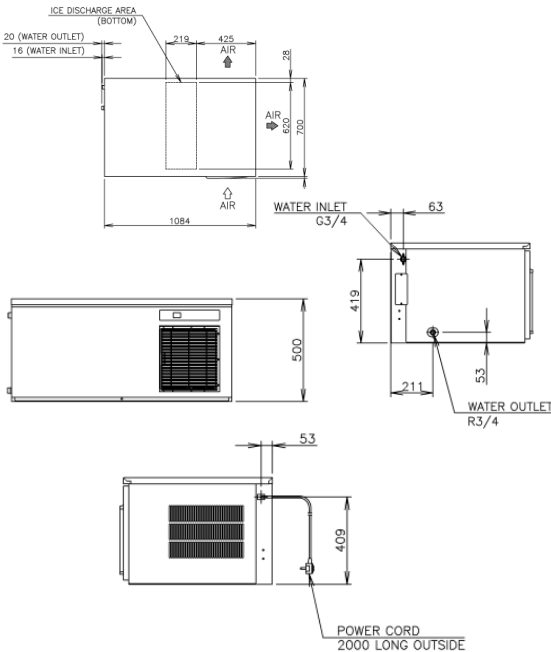

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 205kg @21°C Air temp; 15°C Water Approx. 160kg @32°C Air temp; 21°C Water
Freeze Cycle Time	Approx. 19 Min
Ice Production / cycle	Approx. 3.2kg/140pcs
Dimensions	1,084mm (W) x 700mm (D) x 500mm (H)
Cooling	Air
Weight Net/Gross (kg)	88/101
Refrigerant Charge	R404A / 480g
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10 AMP Plug
Amperage	Running: 6.6A Rated: 6.6A Starting: 35A
Operating Conditions:	
Ambient Temp	1-40°C
Water Supply Temp	5-35°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer’s manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

*Refer to manual for full installation & maintenance requirements.



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au

